

AVAILABLE ACCESSORIES

758007	Crash Cart Mount Adapter Kit
AI2557ASY	Crash Cart Mount
749144	Replacement Sealed Lead Acid Battery
AI4080000	Collection Canister, 800 cc
AI0480010	Canister Only Repl. Kit, 800 cc, Lid Included (Pkg of 10)
AI4080025	Canister Only Repl. Kit, 800 cc, Lid Included (Pkg of 25)
AI4120000	Collection Canister, 1200 cc
AI4120010	Canister Only Repl. Kit, 1200 cc, Lid Included (Pkg of 10)
AI4120025	Canister Only Repl. Kit, 1200 cc, Lid Included (Pkg of 25)
751101	Filter, Hydrophobic with 8" Tubing
751150	Kit, Hydrophobic Filter/Tubing
749002	Tip, Yankauer Suction
750810	Kit, 800 cc, Aspirating Change-Out (Case of 10)
760825	Kit, 800 cc Aspirating Change-out (Case of 25)
749003	Tubing, Connecting 72", 1/4" ID



PRODUCERS OF

PORTABLE SUCTION MACHINES

SUCTION & OXYGEN THERAPY DEVICES

MEDICAL GAS PIPELINE EQUIPMENT

VACUUM & AIR COMPRESSOR PACKAGES AND ACCESSORIES



1111 Lakeside Drive, Gurnee, IL 60031-4099 USA | 1.866.549.6446 | www.ohiomedical.com

255391 REV3 01/2010



HIGHER FLOW!



care-e-vac³

suction and oxygen therapy



DESCRIPTION AND APPLICATION

Care-e-vac® 3 is a high-vacuum and high-flow AC/DC-powered suction unit. It provides suction wherever wall suction is unavailable. Care-e-vac 3 is packaged in a compact, durable, molded polycarbonate and ABS blended case. The unit is compact and very lightweight. It is an excellent choice for hospital code carts, patient transport and wherever battery powered suction is needed. An optional floor stand and crash cart mount are available.

IDEAL FOR



Hospital Code Carts • Physician's Offices • Surgicenters • Nursing Homes • Patient Transportation

TECHNICAL SPECIFICATIONS

Performance

Vacuum Range: 0 to 550 mmHg
 Free Air FLOW: 50 LPM for 60 minutes
 Pump: 12 VDC oil-less diaphragm type

Collection Device

Canister: 800 cc disposable plastic with mechanical shutoff (adjustable bracket will accept any size canister)
 Capacity: Adjustable up to 1200 cc standard
 Tubing: 6' disposable sterile plastic
 Suction Tip: Disposable Yankauer with control vent

Controls

Vacuum Regulator: Rotary type on panel
 Vacuum Gauge: Calibrated to 0-20"/500 mmHg

Electrical Requirements

AC: 110 Volts, 60 Hz
 DC: 12 Volts (nominal)

Battery

Type: Rechargeable sealed lead-acid
 Capacity: 12 Volts, 5 Ampere-Hour
 Average Run Time: 60 minutes when fully charged
 Charger: Integral trickle type supplied
 Charge Time: 6 hours or less to 85% charging, depending on initial charge of battery
 Charge Method: 110-Volt outlet


Physical

Weight: 10.5 lbs.
 Dimensions: 8.5"H x 10.50"W x 8.5"D (without bracket)
 Part Number: 758000

care-e-vac[®] 3

battery/ac powered aspirator

ORAL/TRACHEAL ASPIRATION

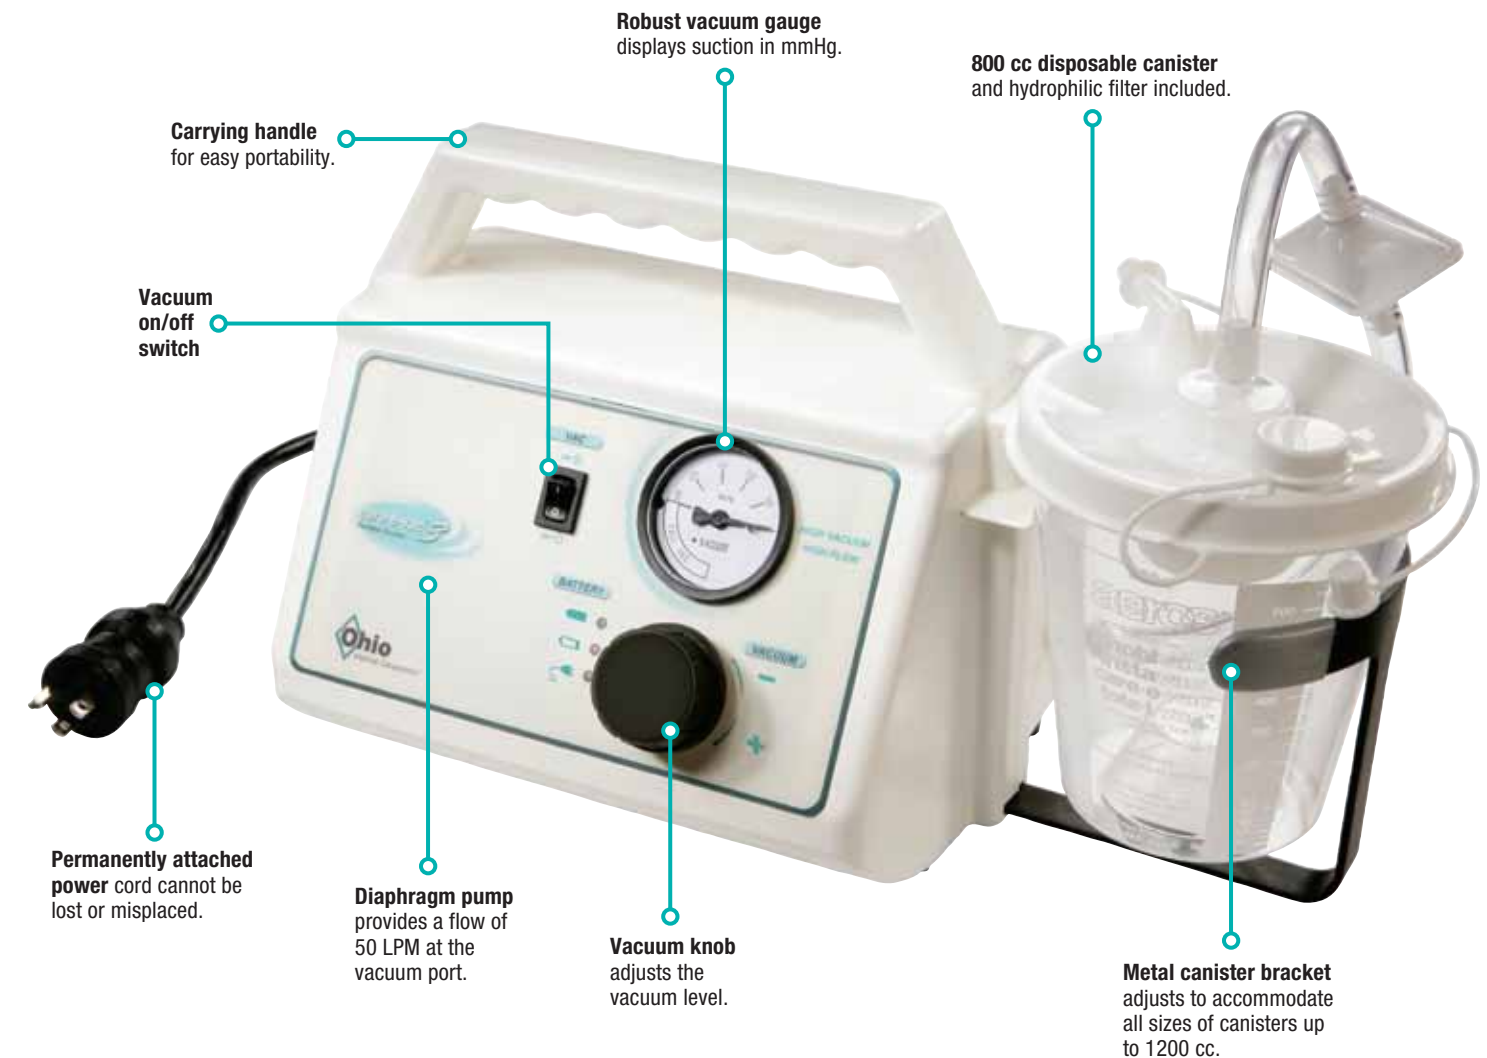

ADDITIONAL FEATURES & BENEFITS

- Constant suction providing 550 mmHg and 50 LPM free air flow
- Easy to clean and process for quick turnarounds
- Compact and lightweight
- 3-year warranty

