

# WARMING CABINETS



# BLANKET & FLUID WARMING CABINETS



## ***FHCDWC36-G***

### Overall Size

30"W x 26.5"D x 74.5"T  
17.59 Cubic FT Storage

### Upper Chamber I.D.

26"W x 23"D x 25"T  
8.63 Cubic FT Storage

### Lower Chamber I.D.

26"W x 23"D x 26"T  
8.96 Cubic FT Storage

### Features

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Independent Controls  
4 Adjustable Shelves  
Stainless or Full View Glass Doors  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy Upper Chamber  
+/- 2 degrees F.  
Accuracy Lower Chamber  
+/- 2 degrees F.

### Electrical

120V, 15 Amp., 50/60HZ  
.69 kw/hr, 2356 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



## ***FHCDWC24***

### Overall Size

30"W x 26.5"D x 74.5"T  
17.2 Cubic FT Storage

### Upper Chamber I.D.

26"W x 23"D x 15.25"T  
5.27 Cubic FT Storage

### Lower Chamber I.D.

26"W x 23"D x 34.5"T  
11.93 Cubic FT Storage

### Features

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Independent Controls  
3 Adjustable Shelves  
Stainless or Full View Glass Doors  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy Upper Chamber  
+/- 1 Degree F.  
Accuracy Lower Chamber  
+/- 3 degrees F.

### Electrical

120V, 15 Amp., 50/60HZ  
.75 kw/hr, 2557 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



## ***FHCSWC72-G***

### Overall Size

30"W x 26.5"D x 74.5"T  
26"W x 23"D x 61"T

### Chamber I.D.

21 Cubic FT Storage

### Features

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Operation  
2 Adjustable Shelves  
2 Fixed Shelves  
Stainless or Full View Glass Door  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy +/- 3 Degrees F.

### Electrical

120V, 7.5Amp., 50/60HZ  
.53 kw/hr, 1810 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



## ***FHCSWC60-G***

### ***FHCDWC60 (not shown)***

### Overall Size Freestanding

30"W x 20.5"D x 64.5"T

### Overall Size Recessed

30"W x 20.5"D x 60"T

### Chamber I.D.

26"W x 17"D x 51"T  
13.05 Cubic FT Storage

### Features

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Operation  
3 Adjustable Shelves  
Stainless or Full View Glass Door  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Push Button Controls  
Accuracy +/- 3 Degrees F.

### Electrical

120V, 7.5 Amp., 50/60HZ  
.46 kw/hr, 1570 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



### ***FHCSWC36-G***

**Overall Size**

30"W x 26.5"D x 36"T  
(base may be removed for 34" height)

**Chamber I.D.**

26"W x 23"D x 25"T  
8.63 Cubic FT Storage

**Features**

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Operation  
2 Adjustable Shelves  
Stainless or Full View Glass Door  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy +/- 2 Degrees F.

**Electrical**

120V, 7.5 Amp., 50/60HZ  
.35 kw/hr, 1195 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



### ***FHCSWC24-G***

**Overall Size**

30"W x 26.5"D x 24.5"T

**Chamber I.D.**

26"W x 23"D x 15.25"T  
5.27 Cubic FT Storage

**Features**

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Operation  
1 Adjustable Shelf  
Stainless or Full View Glass Door  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy +/- 1 Degree F.

**Electrical**

120V, 7.5 Amp., 50/60HZ  
.30 kw/hr, 1024 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



### ***FHCSWC1824-G***

**Overall Size**

24"W x 20.5"D x 24.5"T

**Chamber I.D.**

20"W x 17"D x 15.25"T  
3.0 Cubic FT Storage

**Features**

Temperature Range 90-160 F.  
Digital Control  
Dual Display  
Push Button Operation  
Optional Adjustable Shelf  
Stainless or Full View Glass Door  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy +/- 1 Degree F.

**Electrical**

120V, 3.5 Amp., 50/60HZ  
.45 kw/hr, 1537 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)



### ***FHCSWC1518-G***

**Overall Size**

18"W x 15.5"D x 22"T

**Chamber I.D.**

14"W x 13"D x 13"T  
1.4 Cubic FT Storage

**Features**

Temperature Range 90-135 F.  
Digital Control  
Dual Display  
Push Button Operation  
Optional Adjustable Shelf  
Stainless or Full View Glass Door  
Audible and Visual Over-Temp Alarm  
Rapid Warm Time  
Uniform Heating  
Accuracy +/- 1 Degrees F.

**Electrical**

120V, 3.5 Amp., 50/60HZ  
.39 kw/hr, 1332 btu/hr  
UL/CUL Listed  
(Shown on Optional Dolly)

### ***Optional Keyed Temperature Lockout***




### ***Optional Door Lock***



## STANDARD MODELS

MODEL #	OUTSIDE DIMENSIONS
<b>DUAL CHAMBER WARMERS</b>	
FHCDWC24	30"WX26.5"DX74.5"H
FHCDWC24-G	30"WX26.5"DX74.5"H
FHCDWC36	30"WX26.5"DX74.5"H
FHCDWC36-G	30"WX26.5"DX74.5"H
FHCDWC60	30"WX20.5"DX64.75"H
FHCDWC60-G	30"WX20.5"DX64.75"H
FHCDWC2460	24"WX20.5"DX64.75"H
FHCDWC2460-G	24"WX20.5"DX64.75"H
FHCDWC2424	24"WX26.5"DX74.5H
FHCDWC2424-G	24"WX26.5"DX74.5H
<b>SINGLE CHAMBER UNITS</b>	
FHCSWC1518-G	15"WX15.5"DX22"H
FHCSWC1824	24"WX20.5"DX24.5"H
FHCSWC1824-G	24"WX20.5"DX24.5"H
FHCSWC 24	30"WX26.5"DX24.5"H
FHCSWC24-G	30"WX26.5"DX24.5"H
FHCSWC 36	30"WX26.5"DX36"H
FHCSWC36-G	30"WX26.5"DX36"H
FHCSWC60	30"WX20.5"DX64.75"H
FHCSWC60-G	30"WX20.5"DX64.75"H
FHCSWC2460	24"WX20.5"DX64.75"H
FHCSWC2460-G	24"WX20.5"DX64.75"H
FHCSWC72	30"WX26.5"DX74.5"H
FHCSWC72-G	30"WX26.5"DX74.5"H

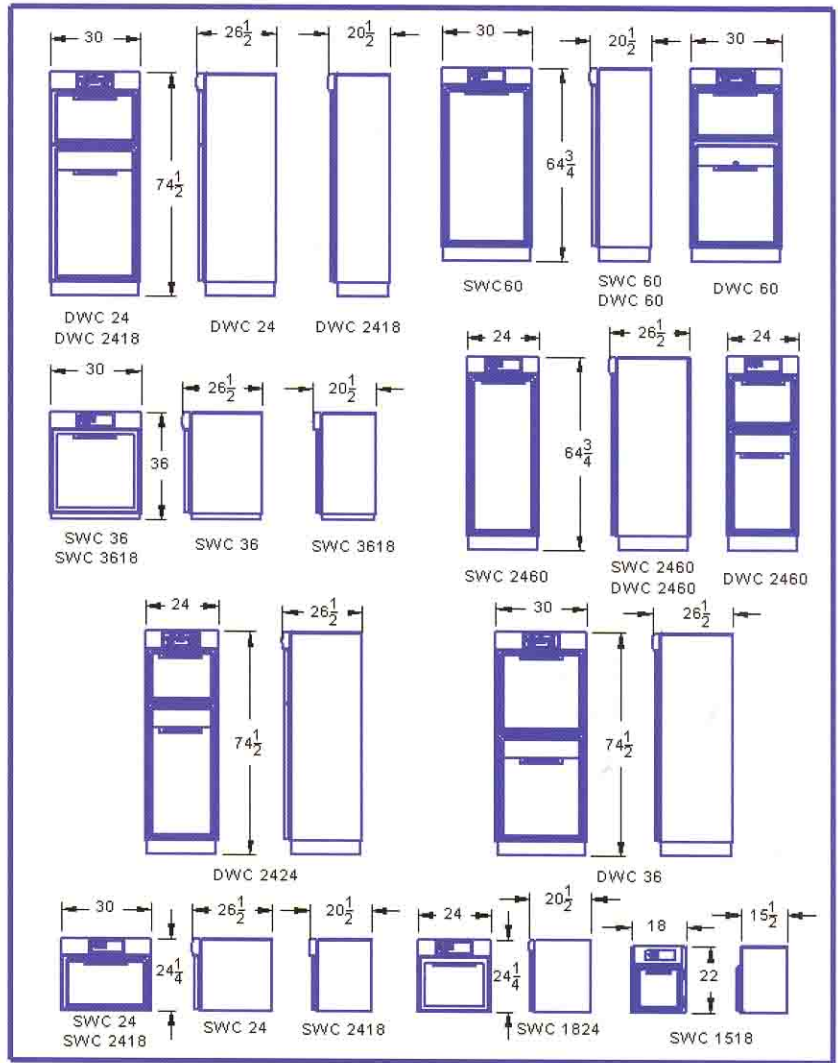

*“NOTE: Due to vast number of sizes available, Not all models shown Please let us know your specific dimensions to get the model that will best suit your needs. If we don’t currently have the size you need, We will build a custom for you!”*

OSHPD  
Anchorage  
Pre-Approval

### HOW TO ORDER

OPTIONS AVAILABLE ON ALL CABINETS:	GLASS DOOR	18" DEPTH	RECESSED UNIT	LH DOOR SWING, HINGES ON LEFT	KEYED TEMPERATURE LOCKOUT	KEYED DOOR LOCK	TEMPERATURE RECORDER	220/240 V, 50/60HZ	PASS THROUGH CHAMBER
OPTION EXTENSION:	G	18	R	LH	TL	DL	TR	220	P

EXAMPLE: FHCDWC24-G-18-R-LH-TL-DL-220-P

## “NOW AVAILABLE”

### OPTIONAL TEMPERATURE DATA LOGGER:

Future Health Concepts, Inc. is pleased to announce the optional data logger to its family of offerings. With this feature you will be able to download data from your warmer electronically to your PC. This will allow you to print charts showing actual temperature changes within your cabinet. Readings are taken every hour and stored until downloaded via palm pilot or laptop. The readings are taken from an alternate source in your unit making this a reliable check and balance. For patient safety, it’s recommended each fluid be manually checked prior to administration.

### WARRANTY

All warming cabinets manufactured by Future Health Concepts, Inc. will carry a lifetime guarantee against product craftsmanship, 1-year labor and 5-year parts guarantee. The factory will service all units with out cost to the buyer for 1-year from shipment. After the 1-year period, replacement of a defective part (labor) will be at buyer’s expense. We will exchange all defective parts at no cost to the buyer for a period of 5-years from shipment. All defective parts must be returned within 30 days to ensure proper credit.